

YH121



即插即用兩向歇刮器
Self-functional interval wiper pack
容易使用，性能可靠
Easy to use, reliable operation
通用的DIN端子腳位
Universal interchangeable
DIN terminal layout
可連續，間歇或單次工作
Can operate continuously,
intermittently or singly

特别适用汽车雨刮间歇控制
Specially for interval wipers

额定参数 Nominal Data		
代号 Code	额定电压 Nominal Voltage (VDC)	功耗 Power Consumption (W)
012	12	1.6


触点参数 Contact Data		
触点形式	Contact Form	一组转换(Z) 1 Form C
触点负载	Contact Load	40A / 14 VDC
寿命 Service Life	电气 Electrical	3×10 ⁴ ops

特性参数	Characteristics	
间歇时间	Interval Time	5~9 sec.
刮水时间	Wipe Time	3.5~6.0 sec.
冲击	Shock Resistance	15g, 11ms
振动	Vibration Resistance	DA 1.5mm, 20~200HZ
环境温度	Ambient Temperature	-40℃ to 70℃;
重量	Weight	约 62g Approx 62g


		订货标志	Ordering Code	
	YH 121/	012-	Z	-P
型号 Model				
额定电压 Nominal Voltage/	12VDC			
触点形式 Contact Form/	Z: 一组转换 1 Form C			

环保要求 Environmental Protection/ 无 None: 含铅 Lead; P: 无铅(RoHS)

外形尺寸图 Overall Dimensions

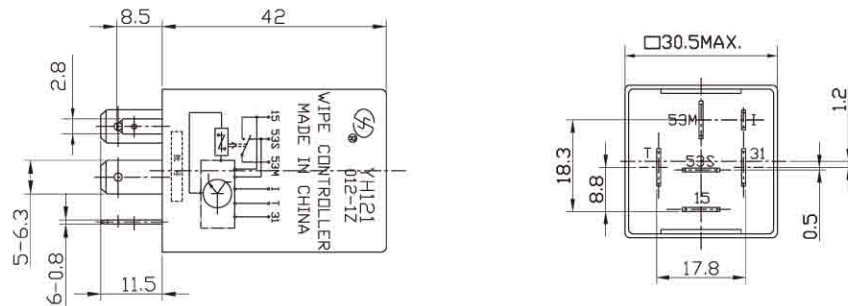

接线图 Wiring Diagrams

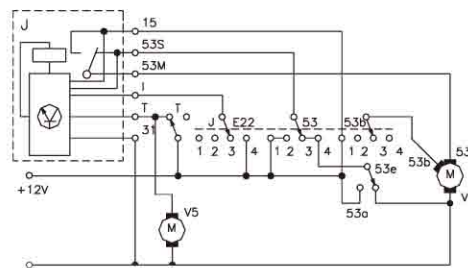

设定 Settings:

- | | |
|---------|----------------|
| 1. 慢速刮水 | Slow wiping |
| 2. 快速刮水 | Quick wiping |
| 3. 停止 | Stop wiping |
| 4. 间隙刮水 | Intermittent |
| T. 车窗清洗 | Window Rinsing |

图标 Legend:

- | | | |
|------|------------|-----------------------|
| J. | YH121雨刮控制器 | Wipe Controller YH121 |
| V. | 雨刮电机 | Wiper motor |
| V5. | 车窗清洗泵 | Window rinse pump |
| E22. | 雨刮选择开关 | Wiper Select switch |

说明 Notes:

- 1.以上参数除另有规定外均以室温23度为准。

All parameters, unless otherwise specified, are measured at ambient temperature 23°C.

- 2.可按用户特殊要求定制规格产品。

Custom-made service with operational quantity, please let us know you special requicements.